

## Stereax<sup>®</sup> M50 – Miniature Solid State Battery for MedTech

### Features

- ▲ Dedicated to the Needs of MedTech
- ▲ Ultra-Thin Form factor
- ▲ Miniature Footprint
- ▲ Stackable for Increased Energy Density
- ▲ Customisable Shape and Size
- ▲ All Solid-State Construction
- ▲ Fast Charge
- ▲ Thousands of Cycles
- ▲ Low Self-discharge
- ▲ No Free Lithium

### Physical Properties



- ▲ Footprint: 10.75 x 3.75 mm
- ▲ Thickness <sup>a</sup>: 0.6 mm
- ▲ Mass: 0.1 g
- ▲ Operating temperature: -20°C to +80°C

### Electrical Properties at 37°C

- ▲ Output Voltage (nominal): 3.4 V
- ▲ Capacity (nominal): 50 µAh
- ▲ Charging Source: 4.0V
- ▲ Charging time to 80%: < 10 minutes
- ▲ Charge/discharge cycles <sup>b</sup>: 10,000
- ▲ Peak current <sup>c</sup>: 1 mA

a: Thickness value includes substrate. Thinner substrates are available.

b: 5% DoD; c: 0.5 ms, 3 pulses every second.

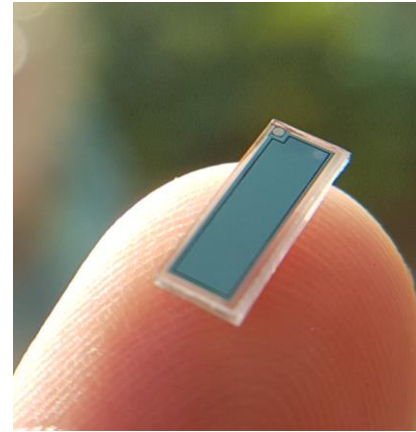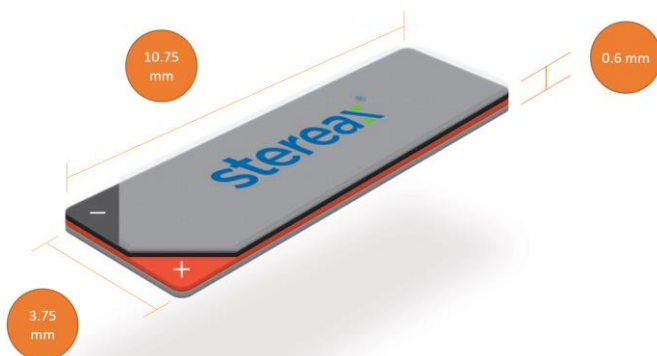

### General Description

The Stereax<sup>®</sup> M50 is Ilika's first solid state battery designed especially for the need of MedTech. The M50 is Ilika's smallest form factor solid state battery to date. At less than 1mm thick, it is ideal for medical applications where size and safety are critical. The M50 is built on Stereax low leakage, reliable technology, but is up to 70% smaller than other batteries in the range. The M50 is customizable to a wide range of shapes and sizes, responding to the energy density and cost constraints of the target application. Devices implanted using our safe technology benefit from a battery life of up to 10 years.

The Stereax technology platform is developed by Ilika who licenses its IP portfolio and know-how based on deposition processes and materials to systems and components OEMs and manufacturers. This format allows Ilika to respond to partners' requirements more efficiently than manufacturing standardized product lines, for an optimal outcome and greater flexibility in terms of shape, capacity, life cycle ...

### Applications

- ▲ Medical implantable devices
- ▲ On-the-body devices
- ▲ Wearables
- ▲ Back-up electronics
- ▲ IoT sensors


## Specifications

Parameter	Test conditions	M50 Specification
Rated Capacity	1 C between 3.0 and 4.0 V	50 $\mu$ Ah
Nominal Voltage	37°C	3.4 V
Operating Voltage	37°C	3 – 4 V
Peak Current	0.5 ms, 3 pulses every second, 37 °C	1 mA
Maximum Continuous Current	37°C	0.5 mA
Standard Discharge Current	37°C	50 $\mu$ A
CC/CV Charging	CC Phase	50 $\mu$ A
	Voltage for CV Phase	4 V
Constant Voltage Charging	4V; Time to 80% of nominal capacity	< 10 minutes
Operating Temperature		-20°C to +80 °C
Cycle life	5% depth of discharge at standard discharge current; 80% of rated capacity remaining; 37°C	10,000 cycles
	100% depth of discharge at standard discharge current; 80% of rated capacity remaining; 37°C	450 cycles
Internal Resistance	Cycle 1 (25 °C)	700 $\Omega$


Note: All specifications contained within this document are subject to change without notice.

## Typical Characteristics (all 37°C)


**Cycle Life**

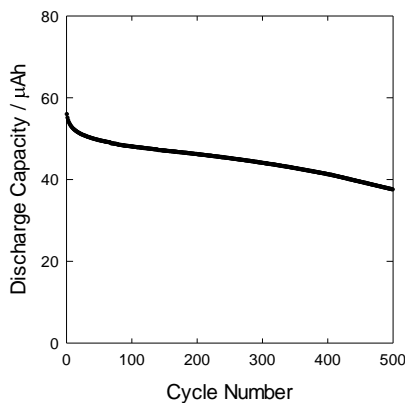

**Rapid Charging**

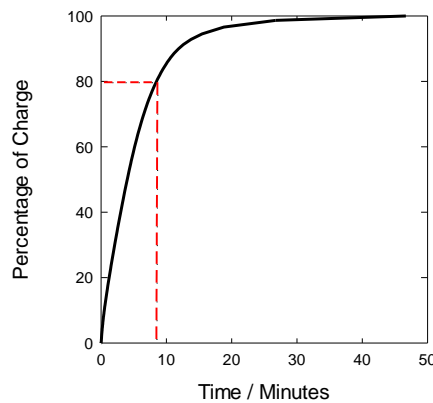

**Discharge Profiles**

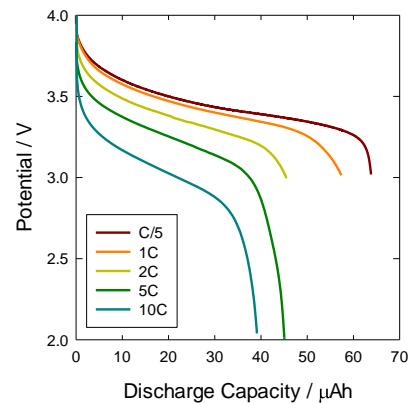

**Disclaimer of Warranties; As Is**

The information provided in this data sheet is provided "As Is" and Ilika Technologies disclaims all representations or warranties of any kind, express or implied, relating to this data sheet and the Ilika Stereax product described herein, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, non-infringement, title, or any warranties arising out of course of dealing, course of performance, or usage of trade. Ilika Stereax products are not approved for use in life critical applications. Users shall confirm suitability of the Ilika Stereax product in any products or applications in which the Ilika Stereax product is adopted for use and are solely responsible for all legal, regulatory, and safety-related requirements concerning their products and applications and any use of the Ilika Stereax product described herein in any such product or applications.

Ilika, the Ilika logo and Stereax are trademark of Ilika technologies. All rights reserved